



EU OFFICE

Drage Todorovic 54,34113

Kragujevac, SRBIJA

27 Glenstroke Drive, M1S

CANADA OFFICE

3A1 Toronto, Ontario,

Canada

Phone:

+381 60 63-77-551

E-mail:

office@maroworldinc.com

Web:

www.maroworldinc.com

MULTISTAGE SHREDDER SYSTEM MWI TRISHREDDER 6060


PRODUCT DESCRIPTION

Tri Shredder 6060 comes with three cutting units and a throughput of up to 2500 kg/h in security level P-3. In combination with an MWI baler, the MWI Tri Shredder 6060 becomes a complete disposal system. Maximum speed is achieved through optimal coordination of the cutting units, gentle motor start-up and overload protection through frequency converters. Stable filling chute with integrated overfill protection to control the shredder and the conveyor belt.



PRODUCT INFO

The 6060 has three Shredding system. 1st stage pre-shredding as a four-shaft system, consisting of two intake shafts and two cutting shafts. 2nd & 3rd stage post-shredding as a two-shaft system. Optionally with mechanical extension mechanism for 2nd and 3rd shredder stage in order to set the desired degree of shredding. Optionally with metal separator. Automatic stop and reversal in the event of a material jam. Overfill light barriers for level monitoring between the stages or system control. Optionally with mechanical extension mechanism for 2nd and 3rd shredder stage in order to set the desired degree of shredding.

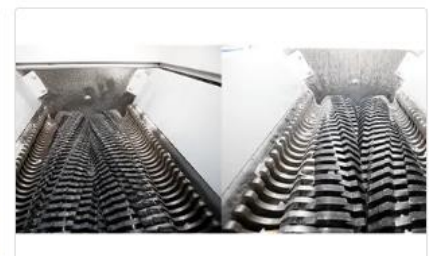

TECHNICAL SPECIFICATION

Type of cut:	Particle cut	Security level	E-3 / F-1 / O-3 / P-4 / T-4
Cutting width:	4.6 mm	DIN 66399 / IEC21964	
Particle length:	34 mm	Paper throughput	2000 kg / h
Input Width	650 mm	Color	Light Grey

Clippings: Paper, staples and paper clips, credit cards, files, USB sticks

